


Drum Pumps For Non-Corrosive Liquids

ALUMINUM PUMP PACKAGE

With Filter (Electric)

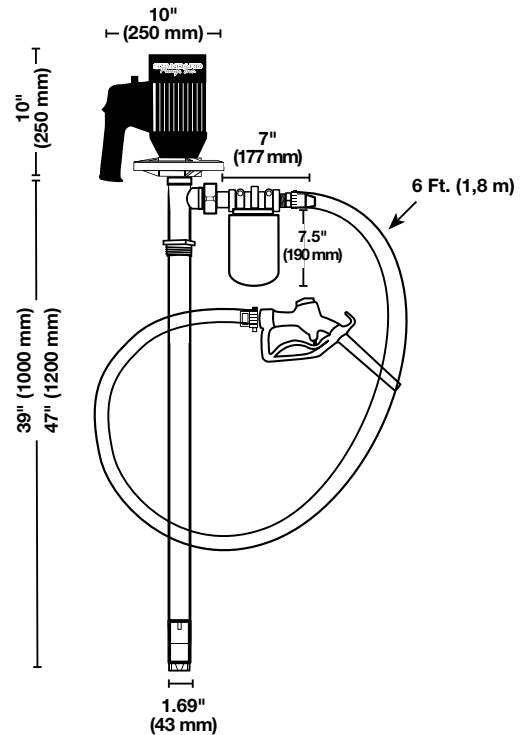

Technical Specifications

Package:Motor, Pump, Hose, Storage Bracket
Filter, Barrel Adapter & Hand Nozzle

Motor Type:Open Drip Proof (IP44)

Pump Assembly:Aluminum, Carbon, PTFE & SS316

Immersion Length:..... 39" (1000 mm) or 47" (1200 mm)

Discharge Hose:..... PVC, 1" (25 mm) I.D., 6 ft. (1,8 m)

Hand Nozzle:Aluminum, 1" (25 mm)

Discharge:..... 1" (25 mm) Hose Barb

Pump Design:..... Sealless / Centrifugal

Maximum Viscosity: 1500 cps (mPas)

Maximum Specific Gravity: 1.8

Maximum Temp:175° F (80° C)

Maximum Flow Rate:..... 15 GPM (56 LPM)

Package Numbers:

Drums:

Pkg P/N	Motor	Volts	Pump Tube	Filter
9470	SP-280P	110V	SP-AL-HH-39	3 Micron
9471	SP-280P	110V	SP-AL-HH-39	10 Micron
9472	SP-280P	110V	SP-AL-HH-39	25 Micron
9473	SP-280P-2	220V	SP-AL-HH-39	3 Micron
9474	SP-280P-2	220V	SP-AL-HH-39	10 Micron
9475	SP-280P-2	220V	SP-AL-HH-39	25 Micron

Tanks:

Pkg P/N	Motor	Volts	Pump Tube	Filter
9480	SP-280P	110V	SP-AL-HH-47	3 Micron
9481	SP-280P	110V	SP-AL-HH-47	10 Micron
9482	SP-280P	110V	SP-AL-HH-47	25 Micron
9483	SP-280P-2	220V	SP-AL-HH-47	3 Micron
9484	SP-280P-2	220V	SP-AL-HH-47	10 Micron
9485	SP-280P-2	220V	SP-AL-HH-47	25 Micron


STANDARD
Pumps, Inc.

www.standardpump.com

Drum Pumps For Non-Corrosive Liquids

ALUMINUM PUMP PACKAGE

With Filter (Air)

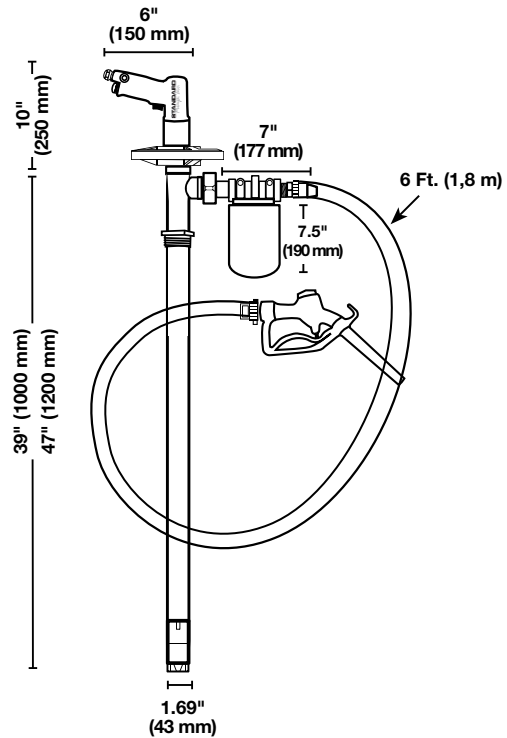

Technical Specifications

Package:Motor, Pump, Hose, Storage Bracket
Filter, Barrel Adapter & Hand Nozzle
Motor Type: *Air 28 cfm @ 90 psi (13,2 @ 6,2 bar)
Air Inlet:..... 1/4" NPTF
Min. Hose Size:..... 3/8" (10 mm)
Pump Assembly:.....Aluminum, Carbon, PTFE & SS316
Immersion Length:..... 39" (1000 mm) or 47" (1200 mm)

Discharge Hose:..... PVC, 1" (25 mm) I.D., 6 ft. (1,8 m)
Hand Nozzle:Aluminum, 1" (25 mm)
Discharge:..... 1" (25 mm) Hose Barb
Pump Design:..... Sealless / Centrifugal
Maximum Viscosity: 750 cps (mPas)
Maximum Specific Gravity: 1.8
Maximum Temp: 175° F (80° C)
Maximum Flow Rate:..... 12 GPM (45 LPM)

Package Numbers:

Drums:

Pkg P/N	Motor	Pump Tube	Filter
9476	SP-A2TL	SP-AL-HH-39	3 Micron
9477	SP-A2TL	SP-AL-HH-39	10 Micron
9478	SP-A2TL	SP-AL-HH-39	25 Micron

Tanks:

Pkg P/N	Motor	Pump Tube	Filter
9486	SP-A2TL	SP-AL-HH-47	3 Micron
9487	SP-A2TL	SP-AL-HH-47	10 Micron
9488	SP-A2TL	SP-AL-HH-47	25 Micron


*Maximum Inlet Pressure 100 psi (6,6 bar)

STANDARD
Pumps, Inc.

www.standardpump.com

Drum Pumps For Non-Corrosive Liquids

ALUMINUM PUMP PACKAGE

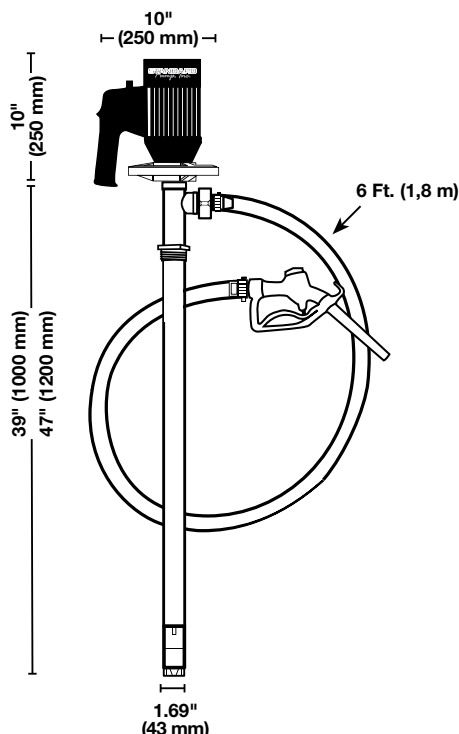

Technical Specifications

Package:Motor, Pump, Hose, Storage Bracket
Barrel Adapter & Hand Nozzle
Motor Type:Open Drip Proof (IP44)
Pump Assembly:Aluminum, Carbon, PTFE & SS316
Immersion Length:..... 39" (1000 mm) or 47" (1200 mm)
Discharge Hose:..... PVC, 1" (25 mm) I.D., 6 ft. (1,8 m)
Hand Nozzle:Aluminum, 1" (25 mm)

Discharge:..... 1" (25 mm) Hose Barb
Pump Design:..... Sealless / Centrifugal
Maximum Viscosity: 1500 cps (mPas)
Maximum Specific Gravity: 1.8
Maximum Temp:175° F (80° C)
Maximum Flow Rate:..... 22 GPM (83 LPM)

Package Numbers:

Drums:

Pkg P/N	Motor	Volts	Pump Tube
9460	SP-280P-V	110V	SP-AL-39
9461	SP-280P-2-V	220V	SP-AL-39

Tanks:


Pkg P/N	Motor	Volts	Pump Tube
9462	SP-280P-V	110V	SP-AL-47
9463	SP-280P-2-V	220V	SP-AL-47

STANDARD
Pumps, Inc.

www.standardpump.com

Drum Pumps For Non-Corrosive Liquids

ALUMINUM PUMP PACKAGE

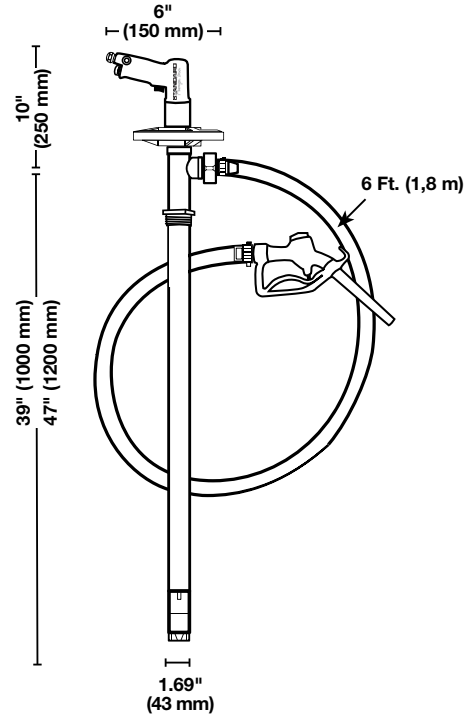

Technical Specifications

Package:Motor, Pump, Hose, Storage Bracket
Barrel Adapter & Hand Nozzle
Motor Type: *Air 28 cfm @ 90 psi (13,2 @ 6,2 bar)
Pump Assembly:Aluminum, Carbon, PTFE & SS316
Immersion Length:..... 39" (1000 mm) or 47" (1200 mm)
Discharge Hose:..... PVC, 1" (25 mm) I.D., 6 ft. (1,8 m)
Hand Nozzle:Aluminum, 1" (25 mm)

Discharge:..... 1" (25 mm) Hose Barb
Pump Design:..... Sealless / Centrifugal
Maximum Viscosity: 750 cps (mPas)
Maximum Specific Gravity: 1.8
Maximum Temp:175° F (80° C)
Maximum Flow Rate:..... 17 GPM (64 LPM)

Package Numbers:

Drums:

Pkg P/N	Motor	Pump Tube
9464	SP-A2TL	SP-AL-39

Tanks:

Pkg P/N	Motor	Pump Tube
9465	SP-A2TL	SP-AL-47

*Maximum Inlet Pressure 100 psi (6,6 bar)